

sputtered coatings (climatical stable)

HR(0°,820-990nm)>99% R(0°,1020-1300nm)<5%

fig. 1 reflection HR-HT-side only 0°, overview

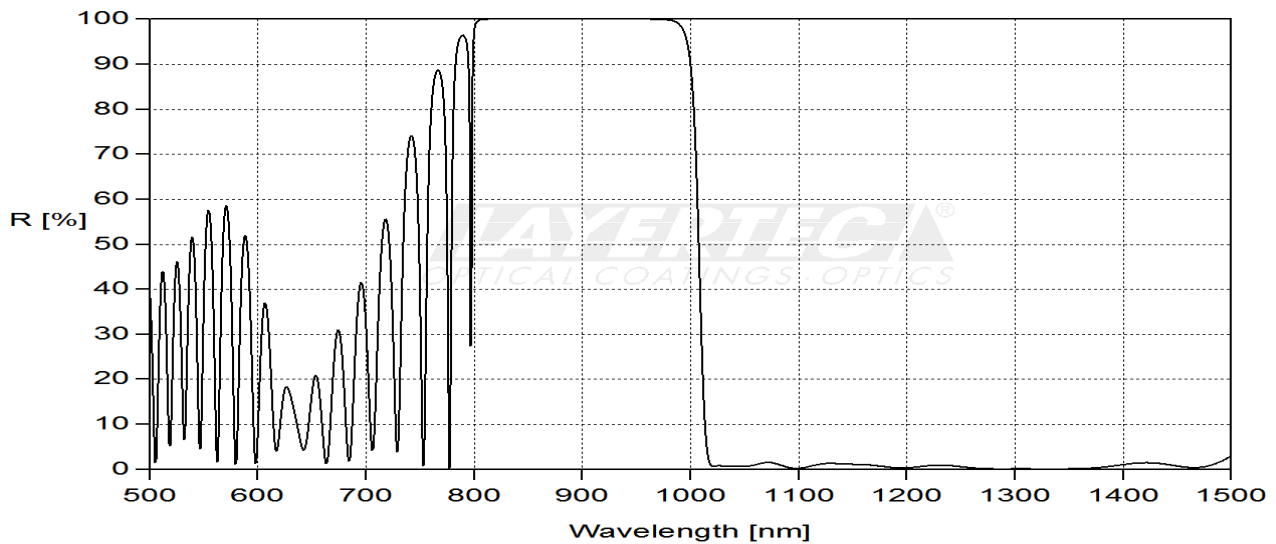


fig. 2 detail cut on/off-region reflection, 0°, please note the production tolerance

