

PR(0°, (950-1450)±10nm)=99.0(±0.5)%, GD optimized for OPO-application

fig. 1 reflection PR-region 0°

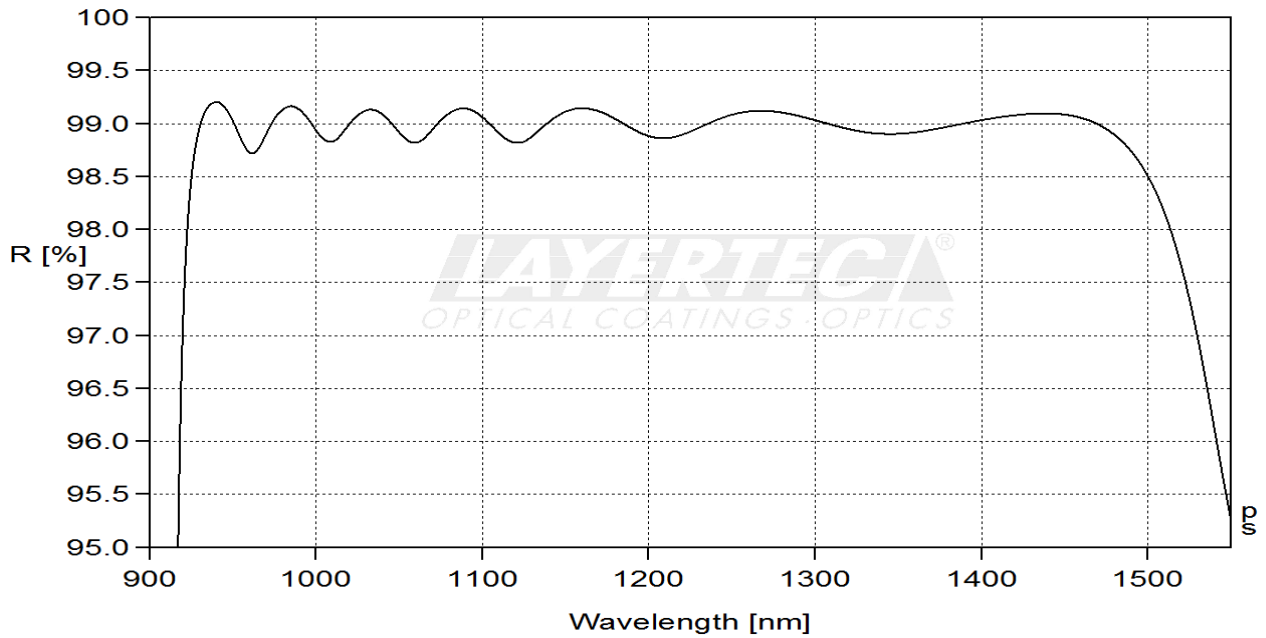


fig. 2 calculated GD(R,0°)

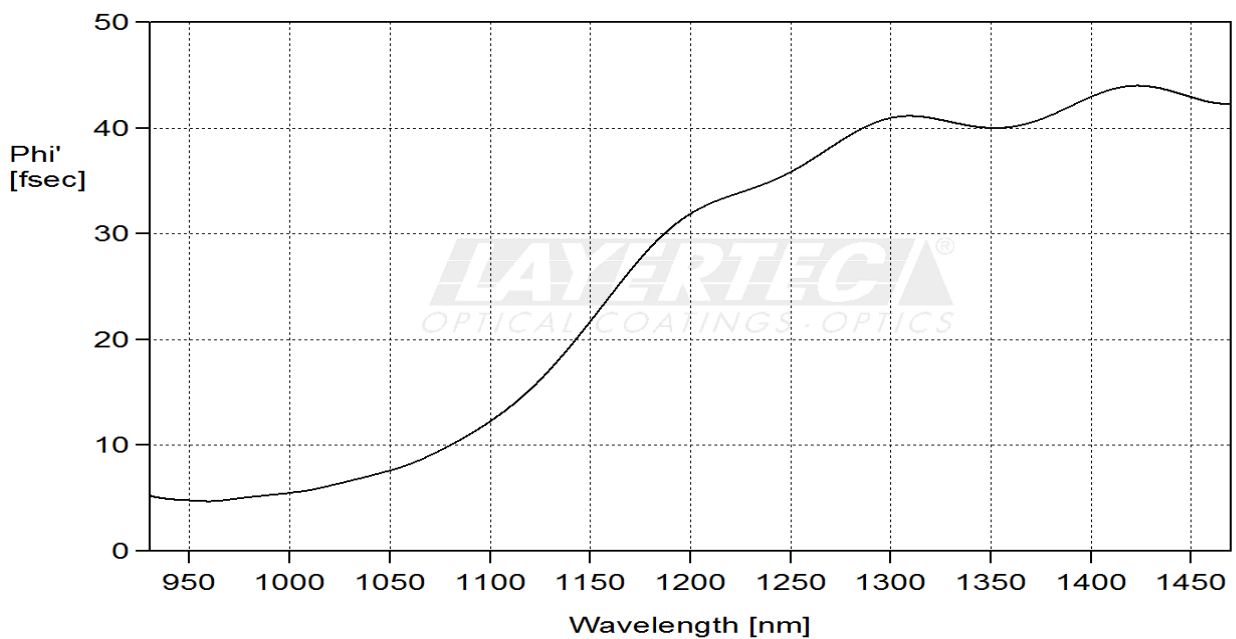


fig. 3 calculated GDD(R,0°)

