

HR(0-10°,1350-1700±15nm)>99.9% + R(0-10°,1030nm)<2% + R(0-10°,2.5-4.5µm)<5%,  
for OPO - application

fig. 1 reflection HR-region

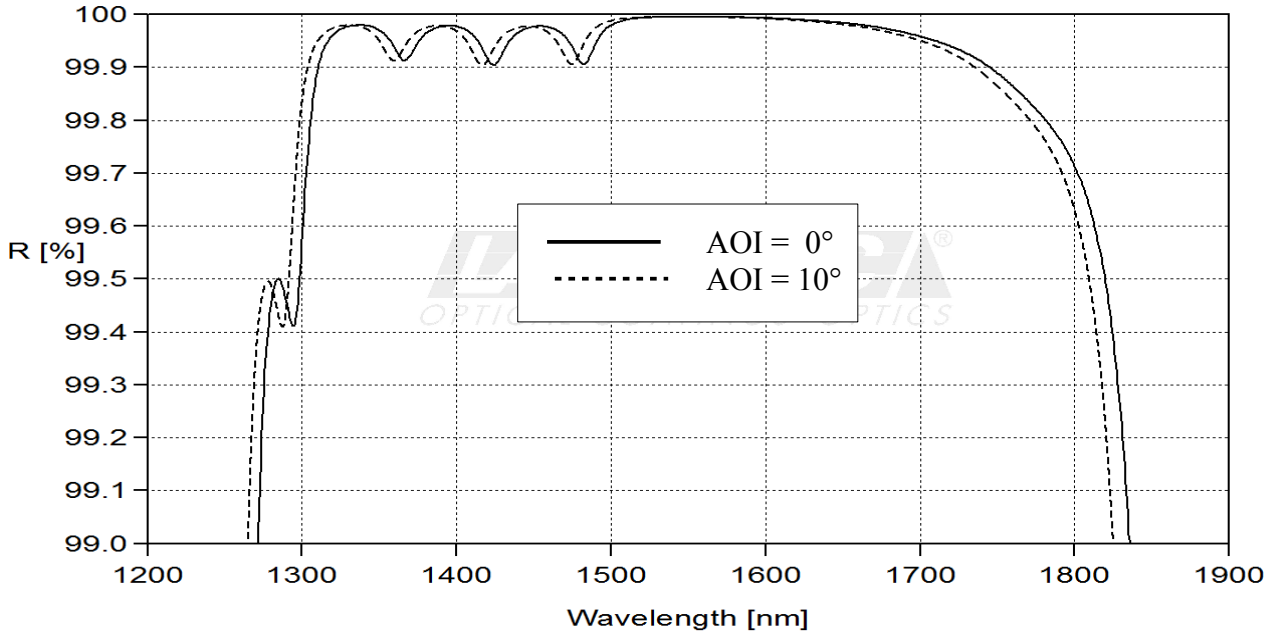


fig. 2 reflection HT-region

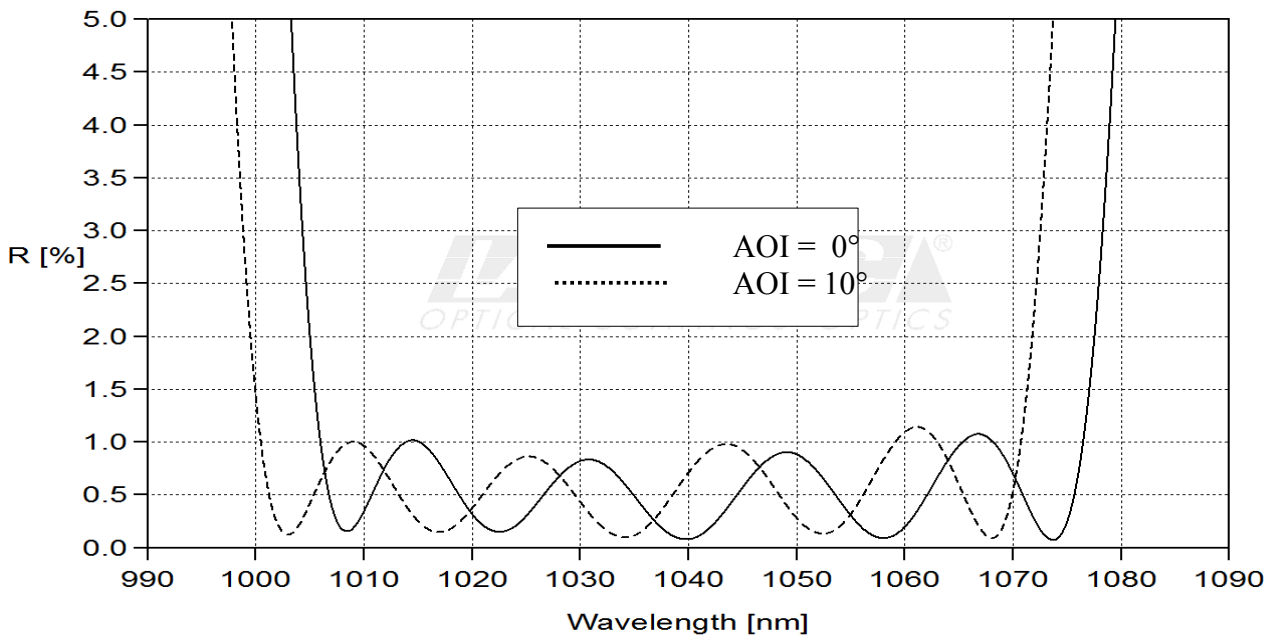


fig. 3 reflection HT-region

