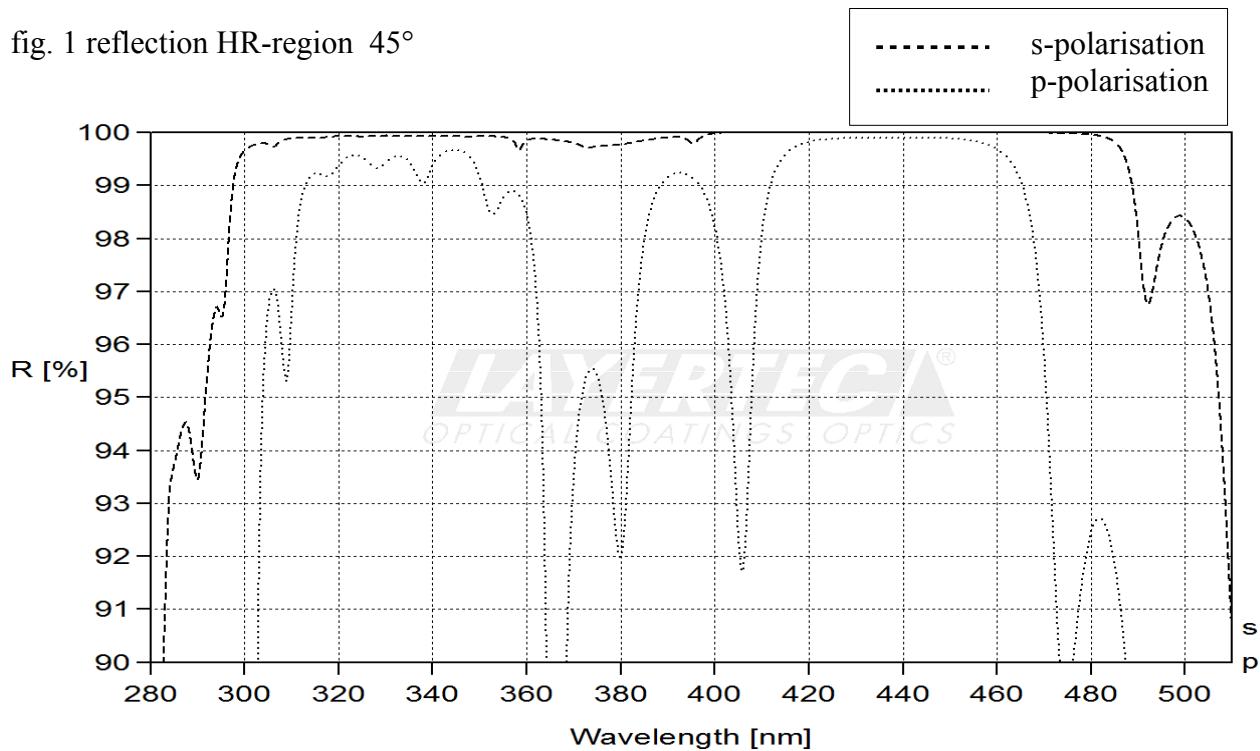
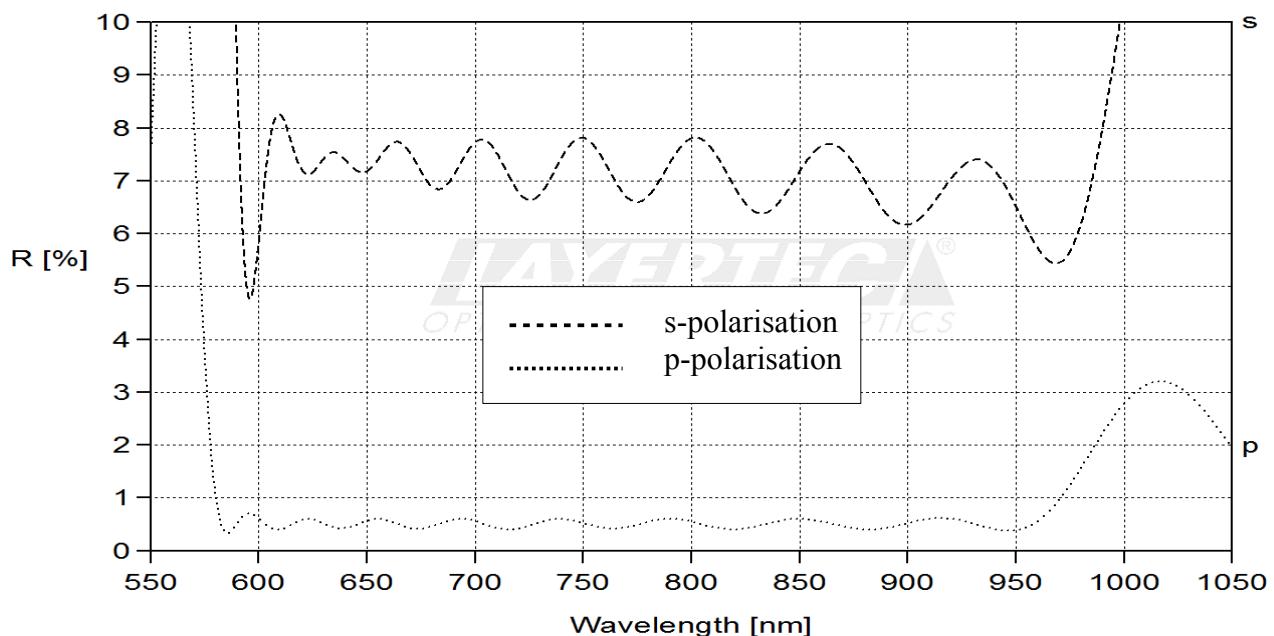


HRs(45° ,320-470nm)>99.5% + Rp(45° ,600-950nm)<2%, GDD-optimiert

fig. 1 reflection HR-region 45° fig. 2 reflection R-region 45° 

Coating 115194

LAYERTEC®
OPTICAL COATINGS · OPTICS

fig. 3 calculated GDD(R,45°) s-polarisation

