


coating: #115225

Non polarization beam splitter coating: **PR_{s,p} (45° 532nm) = 50 ± 5%**
|R_s-R_p| < 3% (not GDD opt.)

fig. 1.1: PR_{s,p} (45° 532nm) = 50 ± 5% + |R_s-R_p| < 3%

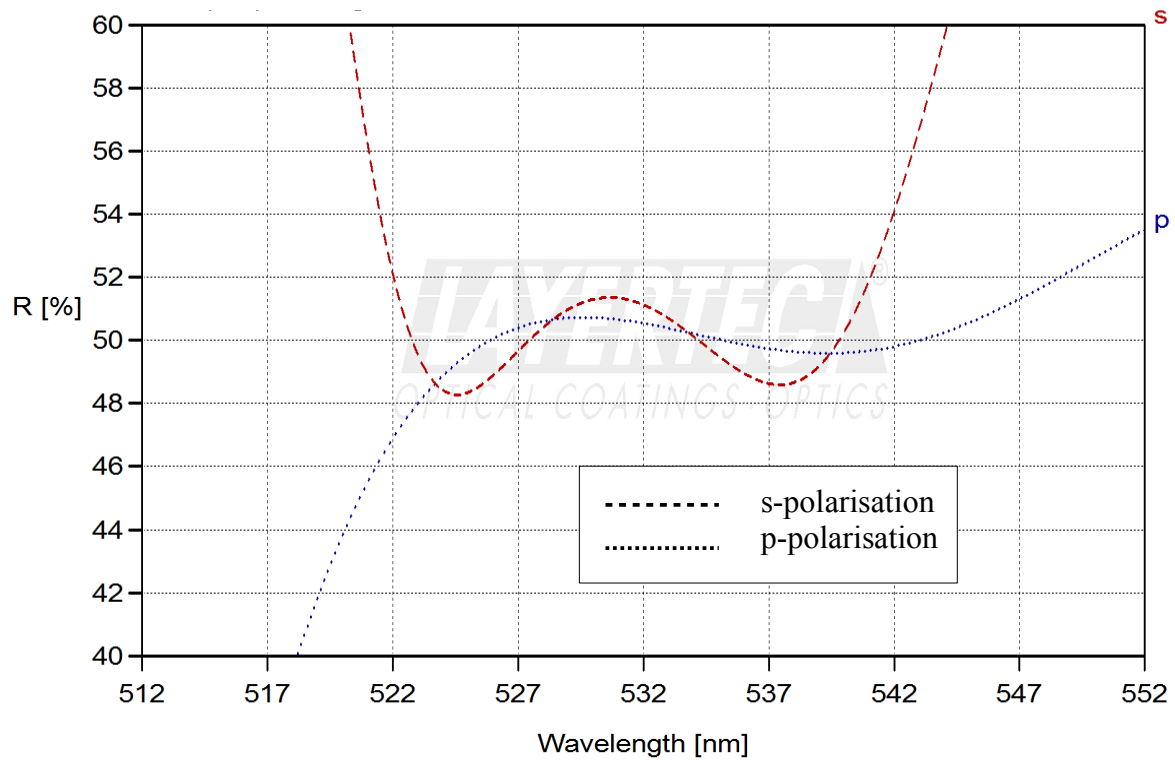

coating: #115225

fig. 1.2: GDD – Rs,p at AOI = 45° at 532nm (not GDD opt.)

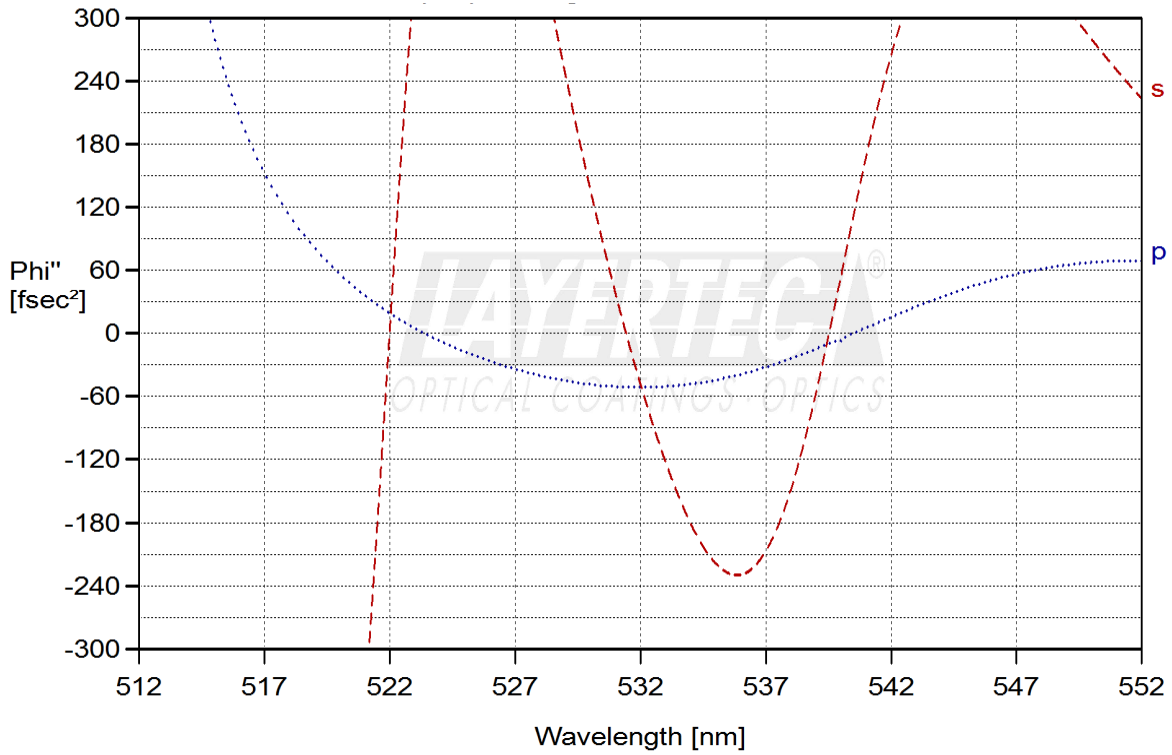


fig. 1.3: GDD – Ts,p at AOI = 45° at 532nm (not GDD opt.)

