

coating: #126090

Low loss broadband high reflectance

coating with defined transmittance:

PR (0°, 300-450 nm) ~ 99.6 ± 0.3%

T (0°, 300-450nm) ~ 0.3 ± 0.2%

fig. 1.1: PR (0°, 300-450 nm) ~ 99.6 ± 0.3%

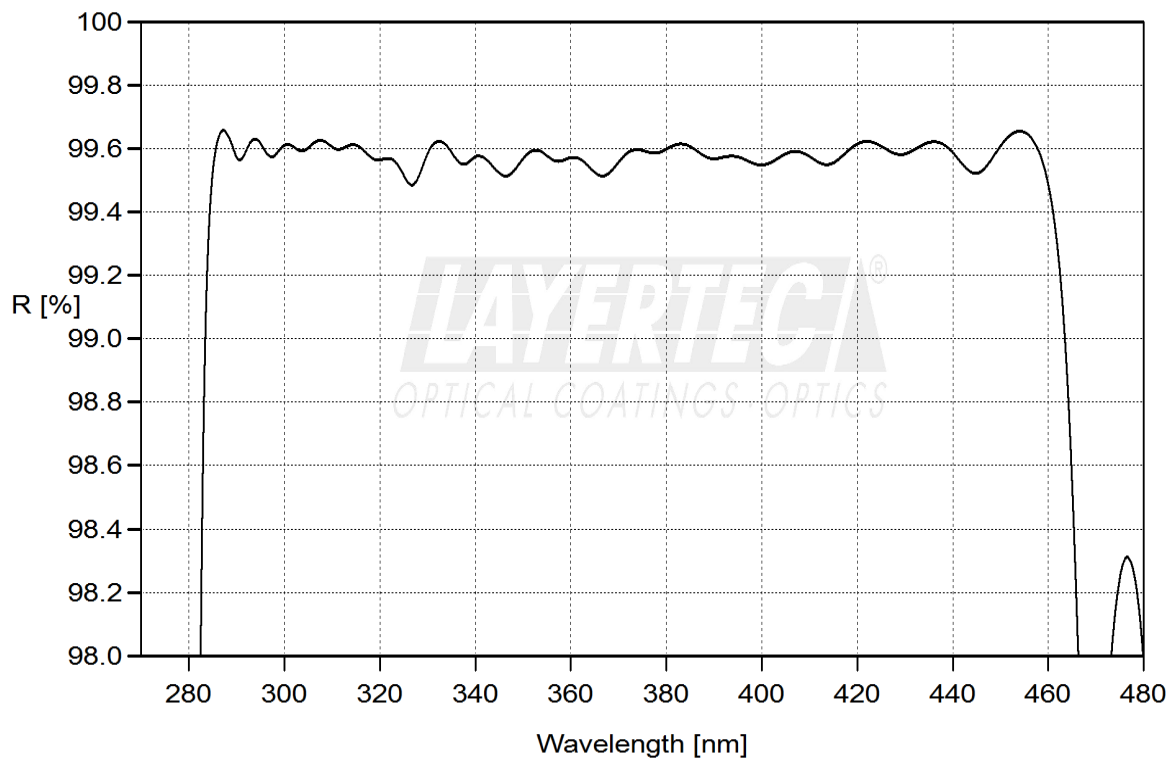


fig. 1.2: T (0°, 300-450nm) ~ 0.3 ± 0.2%

