

Coating 139374

HRs,p(0–10°,1030–1042nm)>99.99 %

|GDD-R s,p(0–10°,1030–1042nm)|<20fs²

production tolerance: center wavelength at 1035 (± 20) nm

for standard laser power → LIDT: 6/ 3 J/cm²; 1030 nm; 10 ps

fig. 1 reflection

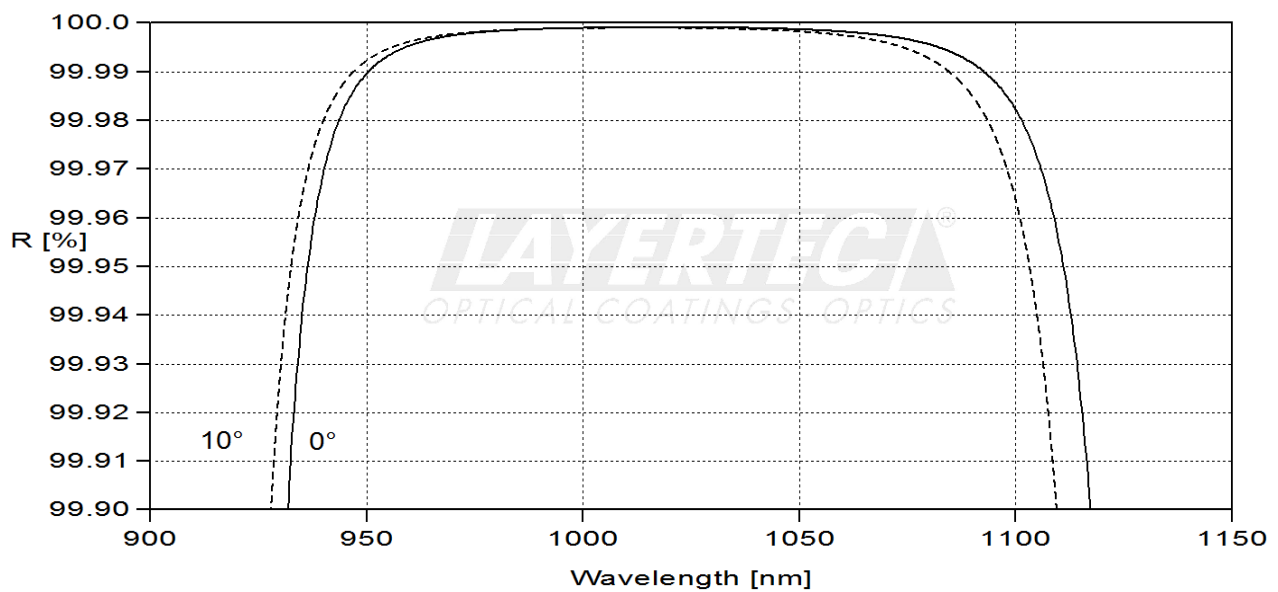


fig. 2 GDD-Rs,p

