

Coating 139691

HRs,p(0-10°,725-875nm)>99.9%
|GDD-Rs,p(0-10°,725-875 nm)| < 50fs²
single stack like
for standard laser power
6/ 2 J/cm² 800nm 70fs 10Hz Ø700µm
6/ 0.4 J/cm² 800nm 40fs 1KHz Ø80µm

production tolerance: center wavelength at 800 (± 15) nm

fig. 1 reflection

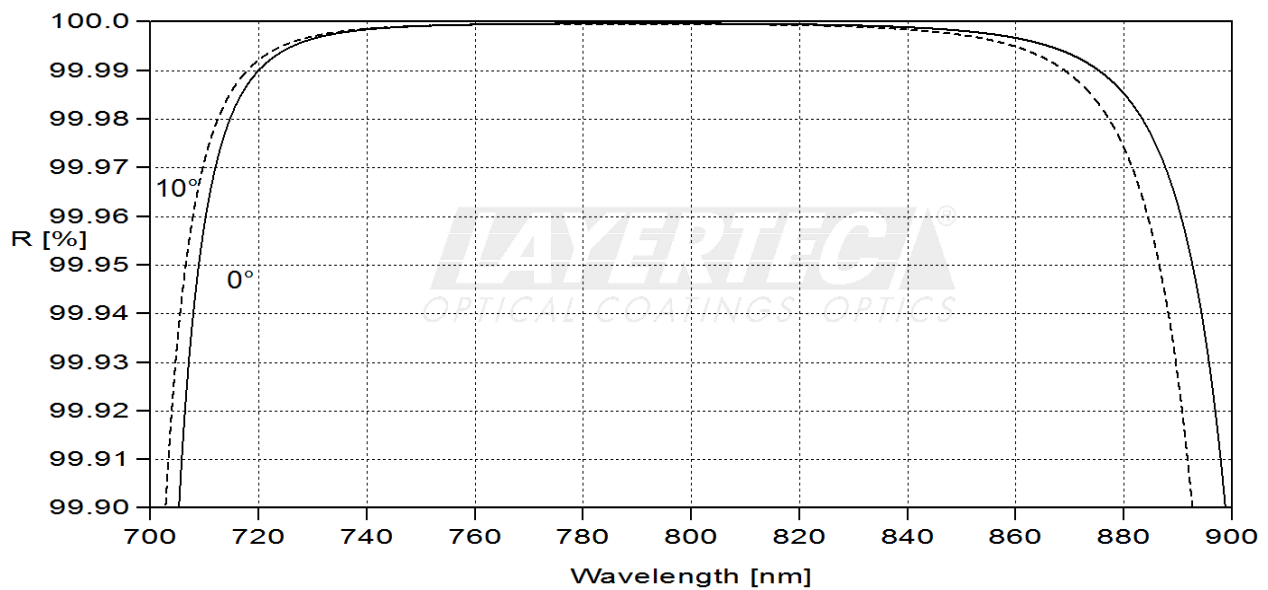


fig. 2 GDD-R (single stack like)

