

Coating 139711

HRp(45°, 725-875nm) > 99.8%

GDD-Rp(45°, 725-875 nm) = -40(±30) fs²

for standard laser power

6/ 0.4 J/cm² 800nm 40fs 1KHz Ø15µm

6/ 0.1 J/cm² 800nm 128fs 4,3MHz Ø15µm

production tolerance: center wavelength at 800 (± 10) nm

fig. 1 HRp(45°)

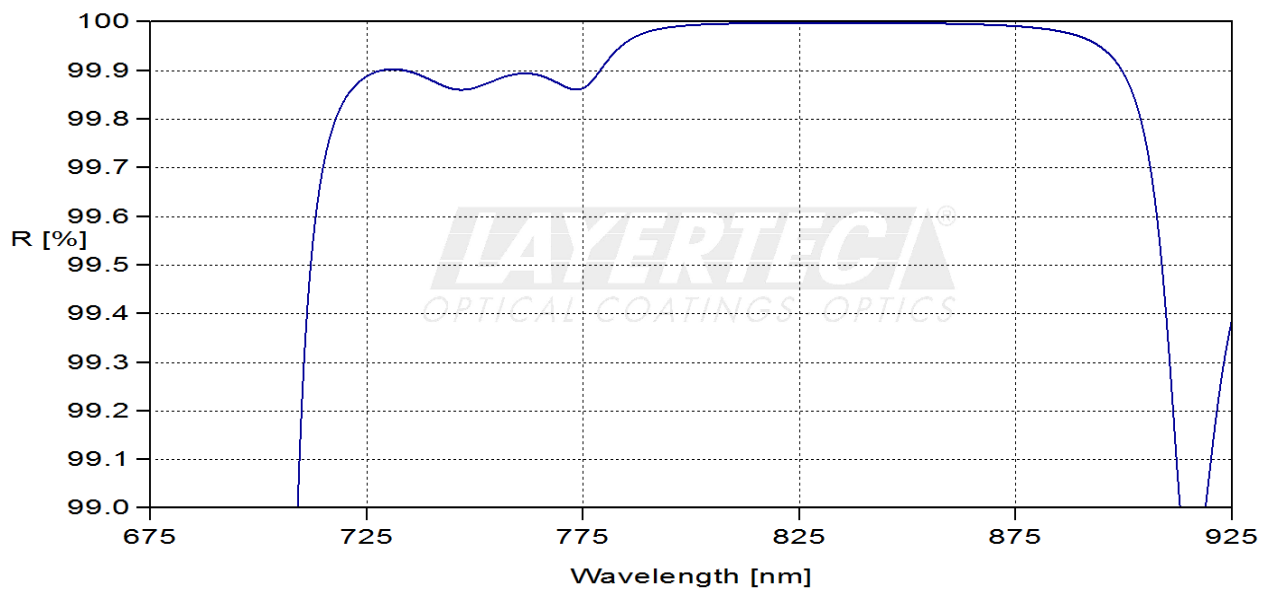


fig. 2 GDD-Rp(45°)

